

# THERMOSTATIC WATER BATH

## DESCRIPTION

Thermostatic water bath is applicable for distillation, concentration, drying and thermostatic heating of medical units, universities and colleges, scientific research units and laboratories of industrial and mining enterprises like chemical printing and dyeing enterprises and pharmaceutical enterprises.



## TECHNICAL PARAMETERS

MODEL	DK-2000-6
Volume	Approx. 22.5 L
Temperature range	RT+5°C to 100°C
Temperature motion	±0.5°C
Sensibility of temperature control	≤±1°C
Display error	≤±2.5°C
Timer	0 - 9999 min
Overall dimensions	Approx. 530 x 330 x 215 mm
Work bath dimensions	500 x 300 x 150 mm
Gross weight	Approx. 9.4 kg
Power	1500 W
Power supply	AC 110V, 60Hz




Ecoshel reserves all the rights to changes in product design, if there are any design change, we will not inform in advance.

## ***STANDARD ACCESSORIES***

1. Removable cover with six holes
2. Concentric ring covers
3. Drain valve

## ***KEY FEATURES***

1. A cover for the six holes water bath distributed in two rows, each with three holes.
2. Compact design for easy mobility.
3. Double LED display to display set time and bath temperature.
4. Soft keyboard and easy-to-use.

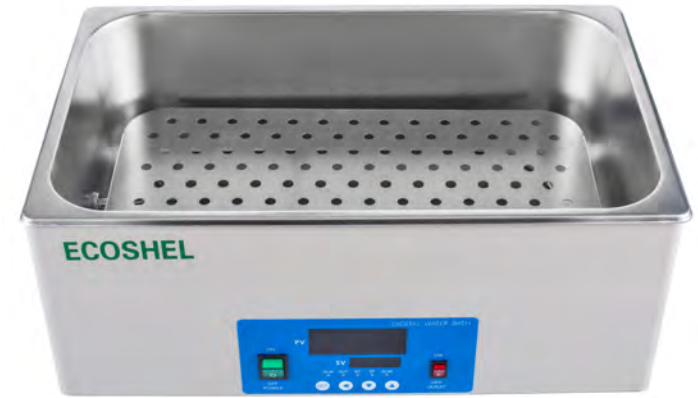

Ecoshel reserves all the rights to changes in product design, if there are any design change, we will not inform in advance.